

S33-16

三节式隐藏阻尼同步滑轨带插销(16板)

FULL EXTENSION SYNCHRONIZE SOFT CLOSING UNDERMOUNTED SLIDE WITH PIN FOR 16MM PANEL

载重: 35公斤

长度: 250~550mm

抽屉高度调节量0~+3mm

Load capacity: 35Kg



Length: 250~550mm

Drawer height adjustment:0~+3mm




滑轨安装尺寸 Installation dimensions

SKW=抽屉内宽度 Internal drawer width
LW=柜内宽度 Internal cabinet width
NL=滑轨标称长度 Slide length
LT=柜内深度 Internal cabinet depth
抽屉尺寸和钻孔 Drawer size and boring
侧板最大厚度: 16mm Max drawerside thickness:16mm

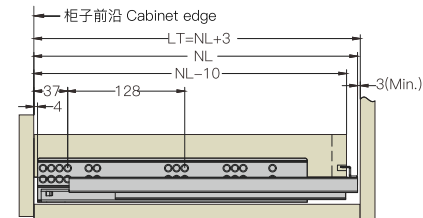
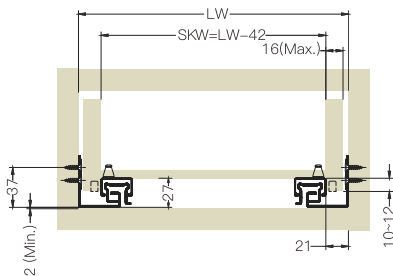


外置抽屉 Standard drawer

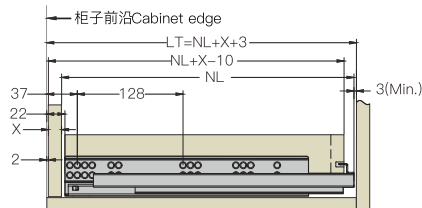


内置抽屉 Internal drawer

NL(mm)	250	270	300	350	400	450	500	550
A(mm)	190	205	245	270	305	330	355	390
B(mm)	215	235	265	315	365	415	465	515

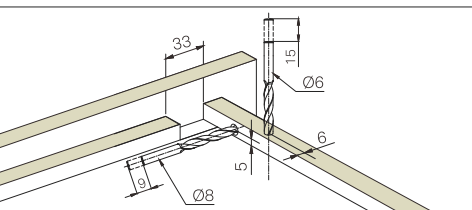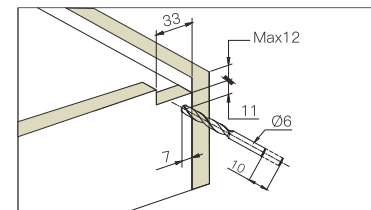

抽屉尺寸和钻孔(mm) Drawer size and drilling

滑轨安装孔位 Hole position

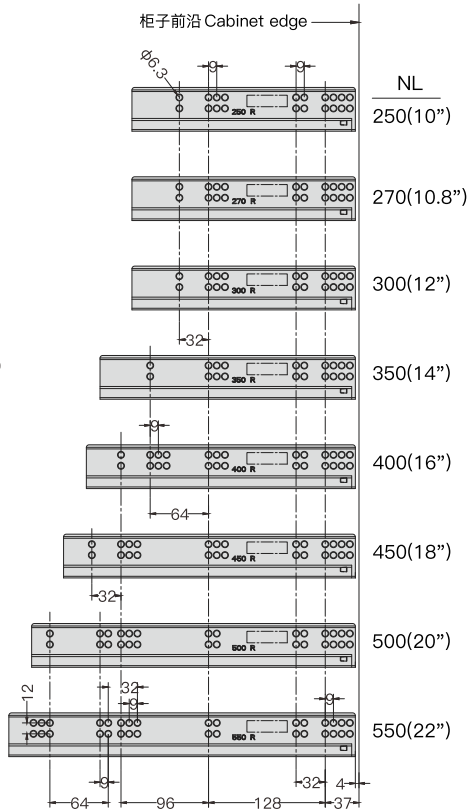

S33-18

三节式隐藏阻尼同步滑轨带插销(18板)

FULL EXTENSION SYNCHRONIZE SOFT CLOSING UNDERMOUNTED SLIDE WITH PIN FOR 18MM PANEL

载重: 35公斤

长度: 250~550mm

抽屉高度调节量0~+3mm

Load capacity: 35Kg



Length: 250~550mm

Drawer height adjustment:0~+3mm




滑轨安装尺寸 Installation dimensions

SKW=抽屉内宽度 Internal drawer width
LW=柜内宽度 Internal cabinet width
NL=滑轨标称长度 Slide length
LT=柜内深度 Internal cabinet depth
抽屉尺寸和钻孔 Drawer size and boring
侧板最大厚度: 19mm Max drawerside thickness:19mm

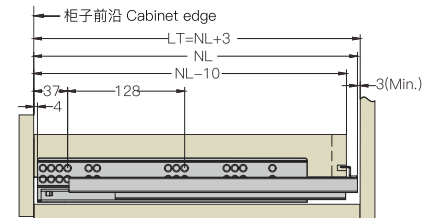
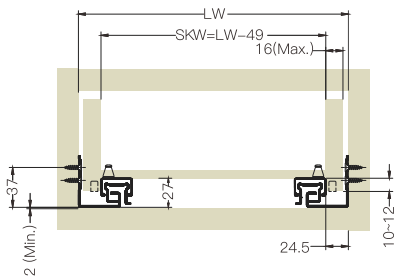


外置抽屉 Standard drawer

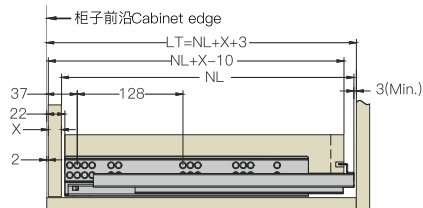

内置抽屉 Internal drawer

NL(mm)	250	270	300	350	400	450	500	550
A(mm)	190	205	245	270	305	330	355	390
B(mm)	215	235	265	315	365	415	465	515

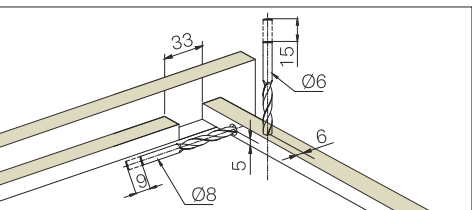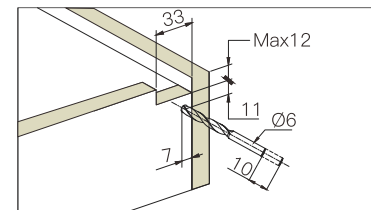

抽屉尺寸和钻孔(mm) Drawer size and drilling

滑轨安装孔位 Hole position

