

T602

HANGING SLIDING DOOR SYSTEM 精进型--挂趟智畅系列

安装简单便捷，节省安装成本；

阻尼快装集成，缓冲配件一体式；

下轮独特设计，门板装卸方便；

上下同步缓冲，缓冲效果极佳；

螺丝刀侧向调节，轻松简便，调节量大；

自动清洁轨道，使滑轮运行顺畅、安静；

门厚: 16~46mm, 20kg≤单门重≤80kg；

单门尺寸: 700≤门宽≤1500, 门高≤2500。

Easy installation;

Clip on damper, dampers and parts are integrated;

Special design of down runner, easy to install and uninstall;

Up and down sync damping, with excellent soft close performance;

Screw drivers can adjust from sides easily, with big adjustment;

Auto cleaning the rail, runners move smoothly and silently;

Door thickness: 16~46mm; Door height≤2500mm;

20kg≤Single door weight≤80kg, 700mm≤Single door width≤1500mm;






配件名称 Accessories	数量 Qty				配件图 Drawing
	单缓冲(两门用量) 双缓冲(两门用量) 双缓冲(三门用量) 双缓冲(三门带对碰) Single side soft close (2 doors) Double soft close (2 doors) Double soft close (3 doors) Full soft close (3 doors)				
外门上轮左 Left up roller for outside door	1	1	1	1	
外门上轮右 Right up roller for outside door	1	1	1	1	
内门上轮左 Left up roller for inside door	1	1	2	2	
内门上轮右 Right up roller for inside door	1	1	2	2	
外门下轮 Down roller for outside door	2	2	2	2	
内门下轮 Down roller for inside door	2	2	4	4	
上缓冲器 Upper damper	2	4	4	6	
下缓冲器 Down damper	2	4	4	4	
上缓冲器挡件 Stopper	2	4	4	4	
防夹的装置 Anti pinch device	1	1	2	2	
对碰挡件 Anti-collide stopper	0	0	0	1	
ST4*16 十字沉头自攻钉 ST4*16 Cross resseded flat head tapping screws	40	40	60	60	


安装参数 Installation

K1 = K+T+8
T= 门板厚度 Door Thickness (16≤T≤46)
F= 侧板厚度 Thickness of side panel


两门单缓冲 Single side soft close for 2 doors

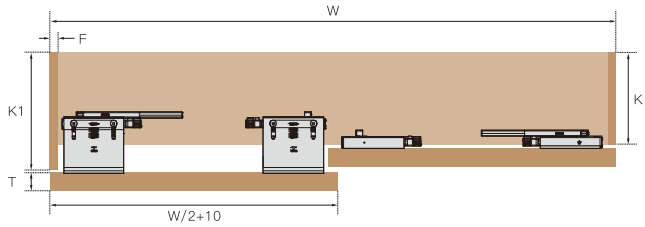


两门双缓冲 Double soft close for 2 doors

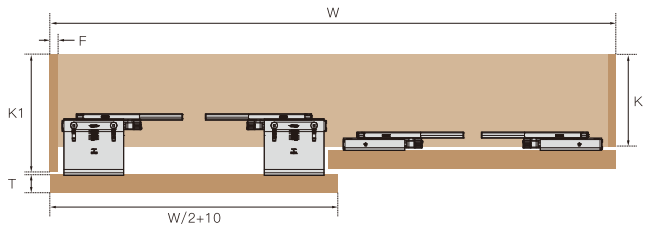

三门双缓冲 Double soft close for 3 doors

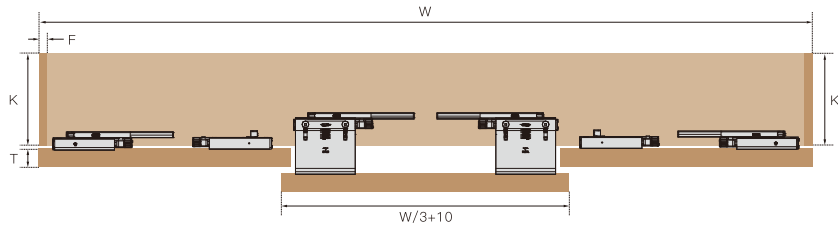


三门双缓冲 (三门带对碰) Full soft close for 3 doors

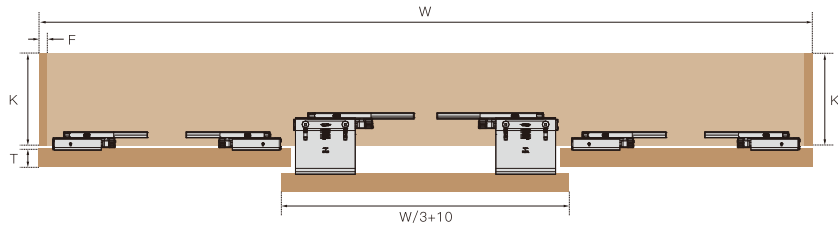

安装参数 Installation

铝材配置

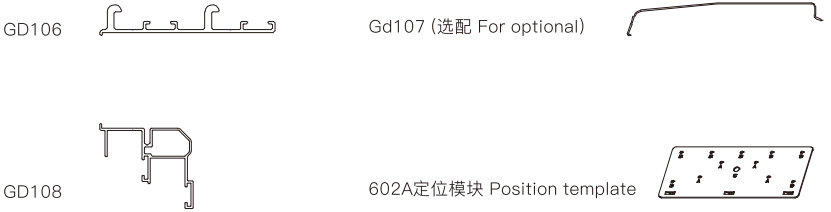

柜体要求 Cabinet Requirements

