

T903


T903吊滑轮系列 HANGING SLIDING ROLLER SERIES



标准配置 ACCESSORIES

型号 Item No:	挂盒 Hanging plate	下导向件 Bottom guide		滑轮&挡件 Runner & Stopper
T903A	 X2	 X1		
T903B	 X2			
T903C	 X2	 X1	 X2	
T903D	 X2	 X1		
T903E	 X2			
				 X2

安装方式 INSTALLATION

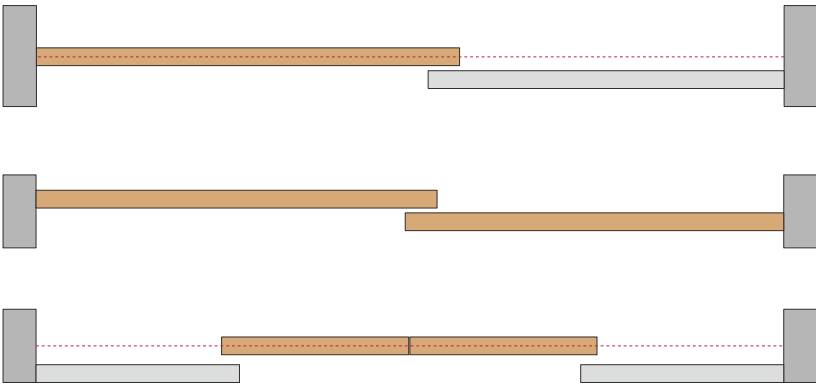

功能与特点 HIGHLIGHTS


采用高精级滑轮，滑动平稳，顺畅、静音；
安装及拆卸便捷；
适用于：单扇及双扇木门、铝框门、玻璃门；
单门重：≤100kg
单门宽：500~1200mm
门厚：35~50mm(木门)，30~50mm(铝框门)，8~12mm(玻璃门)

High precise roller, stable, smooth and silent sliding;
Easy installation and remove;
Apply to Wooden door (Single & Double)、Aluminum frame door、Glass door
Single door weight: ≤100kg;
Single door width: 500~1200mm;
Door thickness: 35~50mm (wooden door), 30~50mm (aluminum frame door), 8~12mm (glass door)

T903A

吊滑轮 (木门开槽) HANGING SLIDING ROLLER (WOODEN DOOR SLOTTING)

安装参数 INSTALLATION

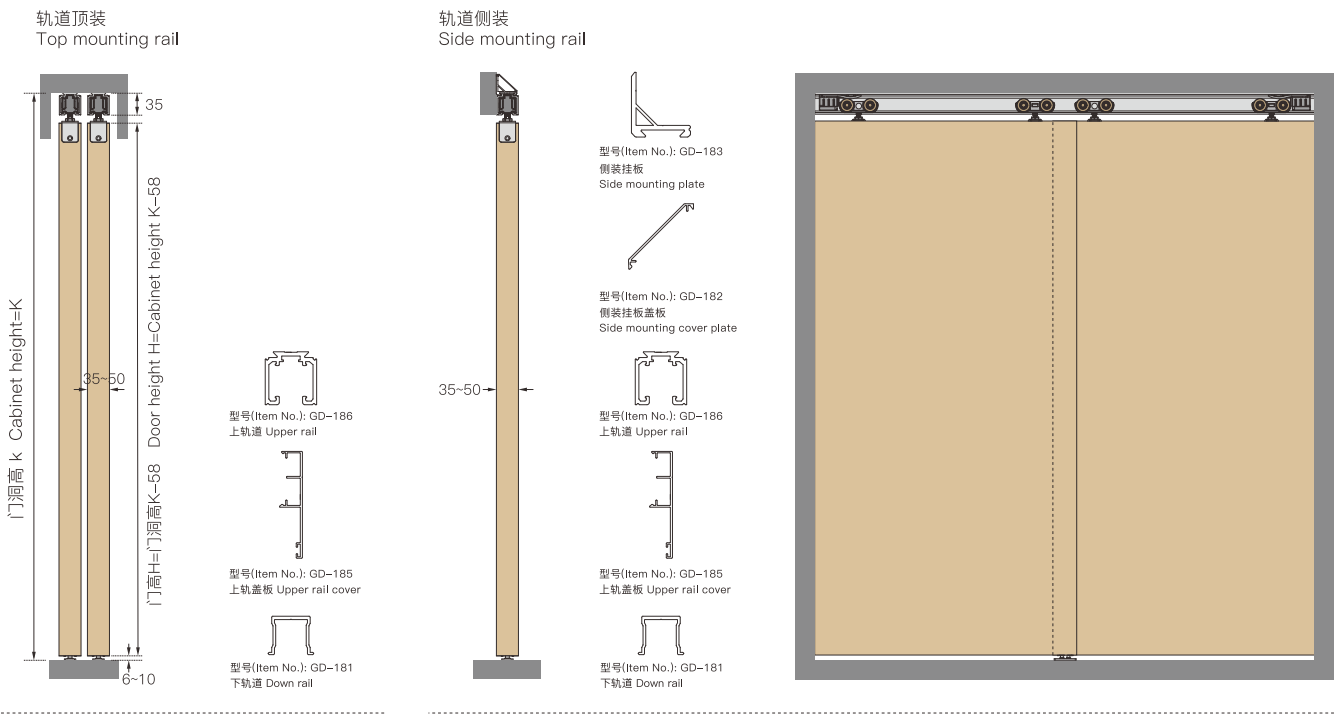

门扇宽度X=门洞宽度W+60
轨道长度L=门扇宽X*2-60




Door width X = Cabinet width W+60
Rail length L = Door width X*2-60

门扇宽度X=门洞宽度W/门数+30
轨道长度L=门洞宽度W


Door width X = Cabinet width W/doors qty+30
Rail length L = Cabinet width W

门扇宽度X=门洞宽度W/门数2+60
轨道长度L=门洞宽W*2+120


Door width X = Cabinet width W/doors qty2+60
Rail length L = Cabinet width W*2+120

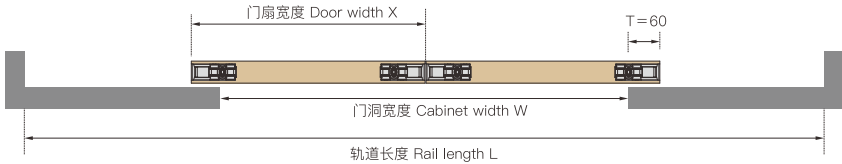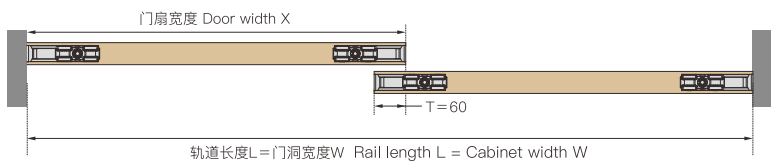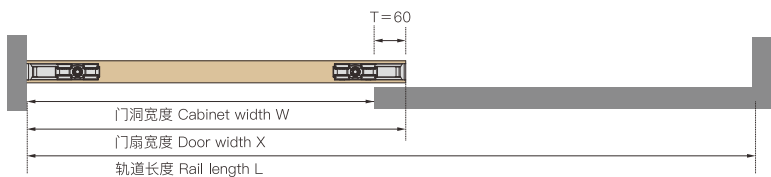


门板开槽
Door slotting

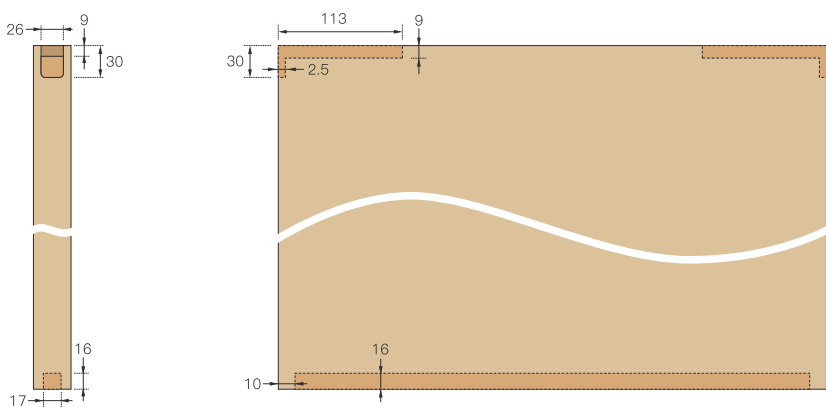

安装挂盒及下轨道
Install hanging plate and down rail

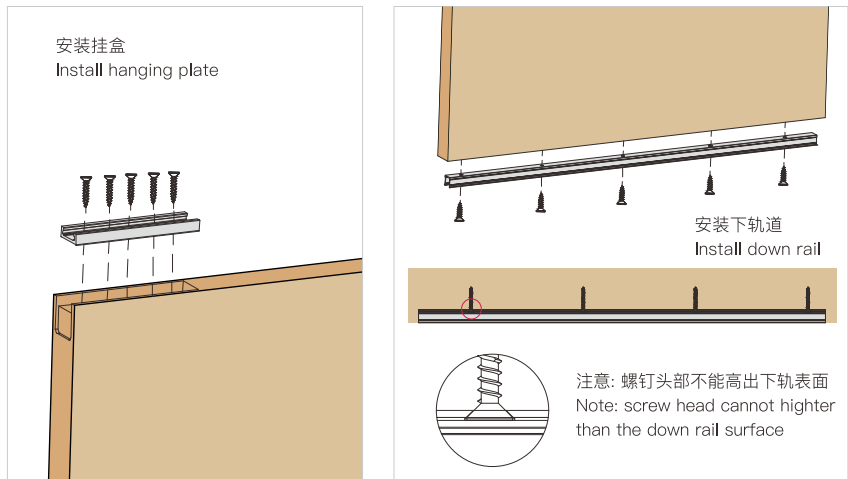


将门停组件和滑轮组件依次装入轨道内部
Stopper components and runners install into the rail

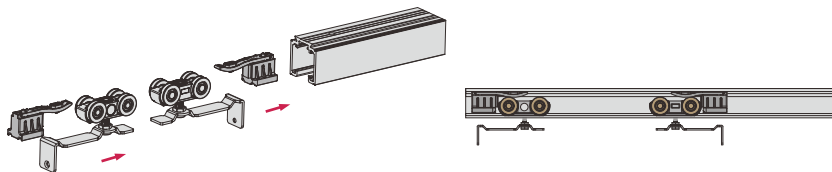

将滑轮组件上的插片插入套内，用自攻螺钉锁紧；
调节门扇水平，安装完成。


Install the insert into sleeve, lock and tighten with screws
Adjust door level to finish installation

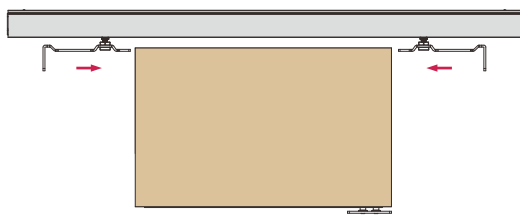

T903B


吊滑轮 (木门不开槽) HANGING SLIDING ROLLER (WOODEN DOOR NO NEED SLOTTING)

安装参数 INSTALLATION

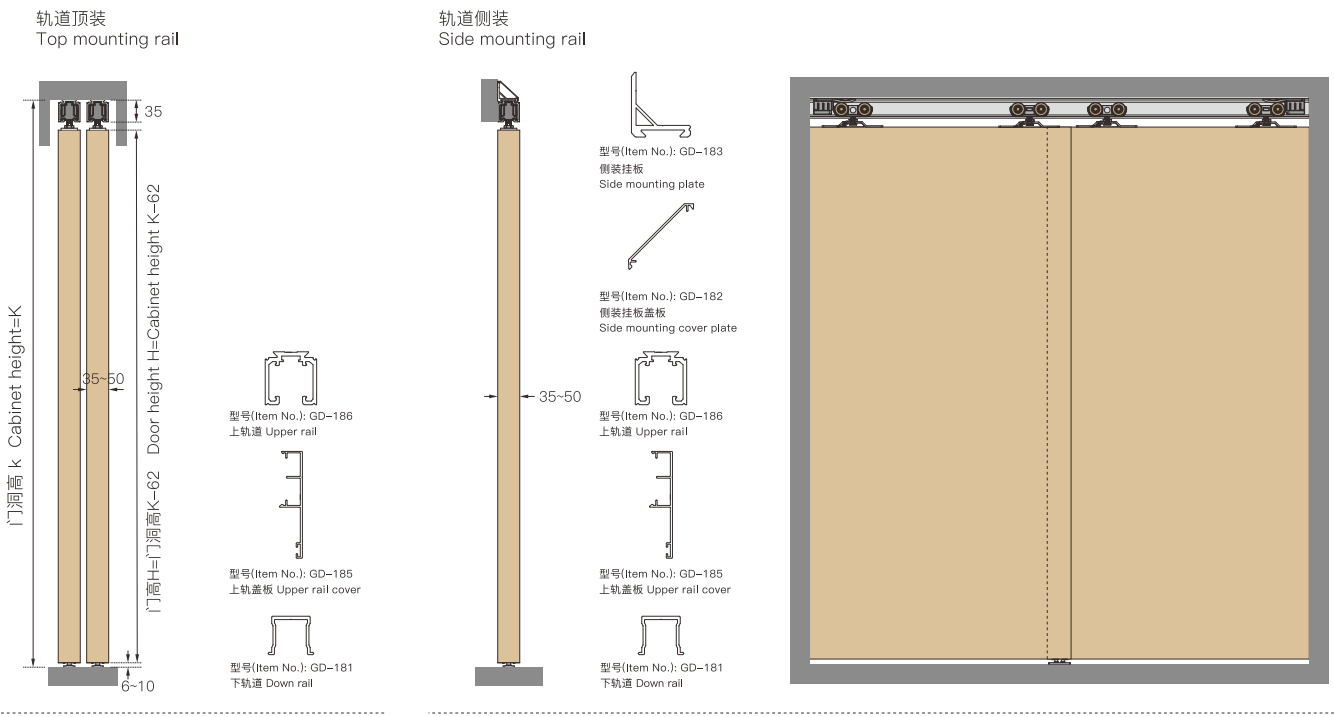


门扇宽度X=门洞宽度W+60
轨道长度L=门扇宽X*2-60

Door width X = Cabinet width W+60
Rail length L = Door width X*2-60

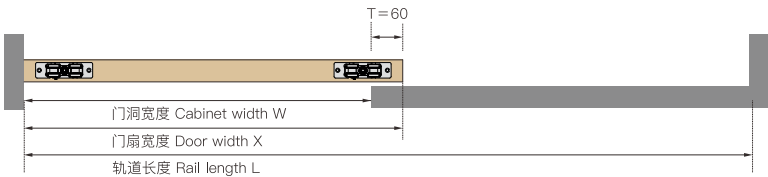


门扇宽度X=门洞宽度W/门数+30
轨道长度L=门洞宽度W

Door width X = Cabinet width W/doors qty+30
Rail length L = Cabinet width W

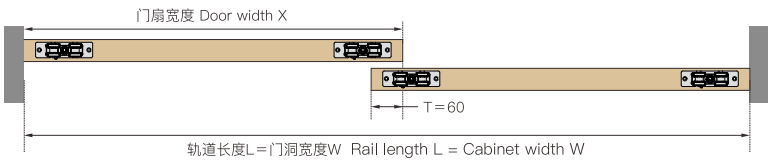


门扇宽度X=门洞宽度W/门数2+60
轨道长度L=门洞宽W*2+120


Door width X = Cabinet width W/doors qty2+60
Rail length L = Cabinet width W*2+120

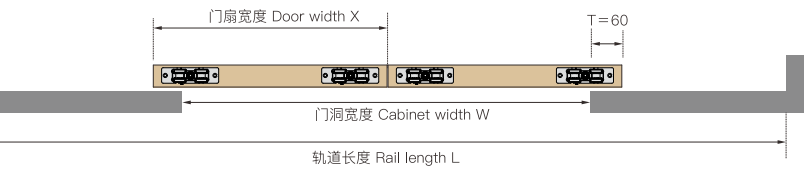


门板开槽
Door slotting

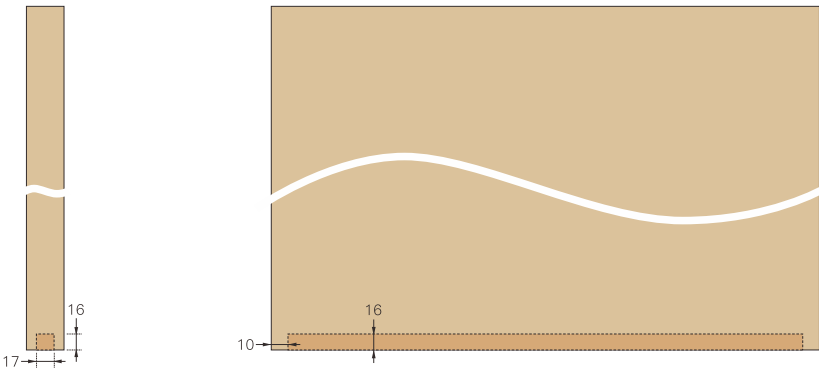

安装挂盒及下轨道
Install hanging plate and down rail

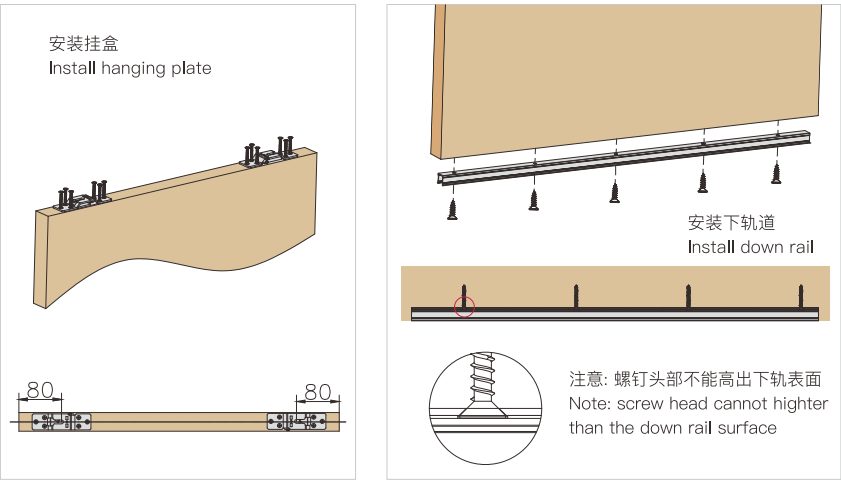


将门停组件和滑轮组件依次装入轨道内部
Stopper components and runners install into the rail

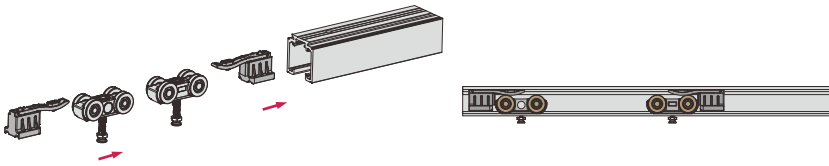

将门扇抬起把滑轮组件上的螺杆底部卡人挂板槽位，
通过扳手调节门扇水平，安装完成。


Lift up the door and put the bottom of rod into the slot

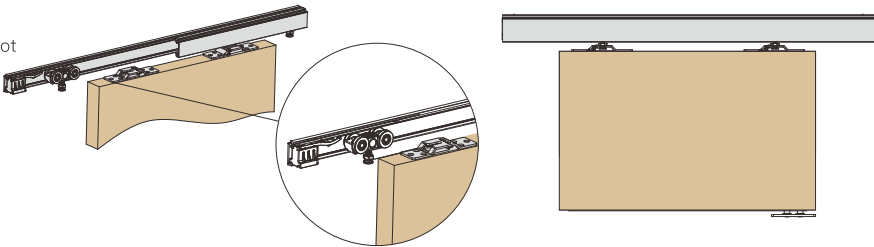

T903C

吊滑轮 (窄边铝框) HANGING SLIDING ROLLER (NARROW EDGE ALUMINUM FRAME)

安装参数 INSTALLATION

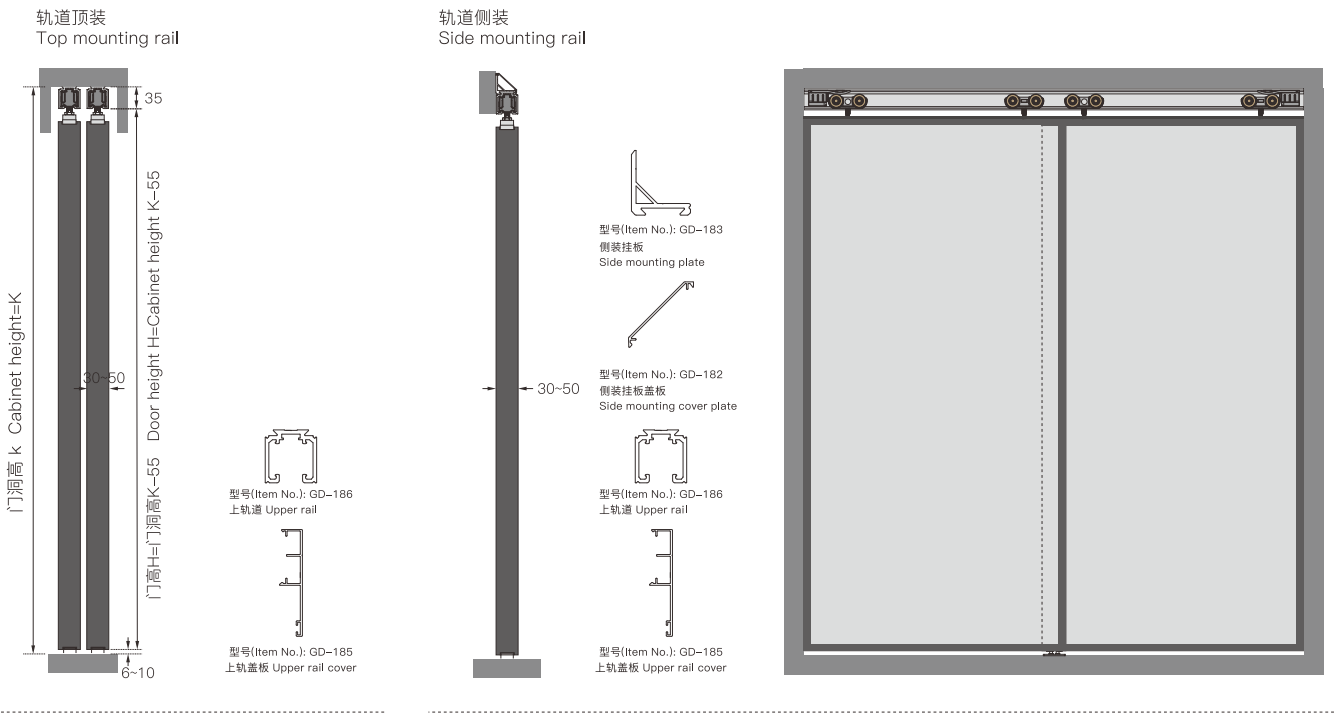

门扇宽度X=门洞宽度W+16
轨道长度L=门扇宽度X*2-16

Door width X= Cabinet width W+16
Rail length L = Door width X*2-16

门扇宽度X=门洞宽度W/门数+16
轨道长度L=门洞宽度W


Door width X = Cabinet width W/doors qty+16
Rail length L = Cabinet width W

门扇宽度X=门洞宽度W/门数2+16
轨道长度L=门洞宽度W*2+32

Door width X = Cabinet width W/doors qty2+16
Rail length L= Cabinet width W*2+32

门板 Door panel





T903C挂盒 Hanging plate

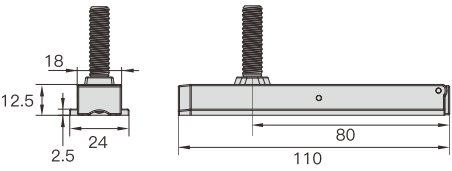

将门停组件和滑轮组件依次装入轨道内部
Stopper components and runners install into the rail

安装防滑出配件
Install anti-slip accessories


安装门板并调节门扇水平，安装完成
Install door panel and adjust door level to finish installation

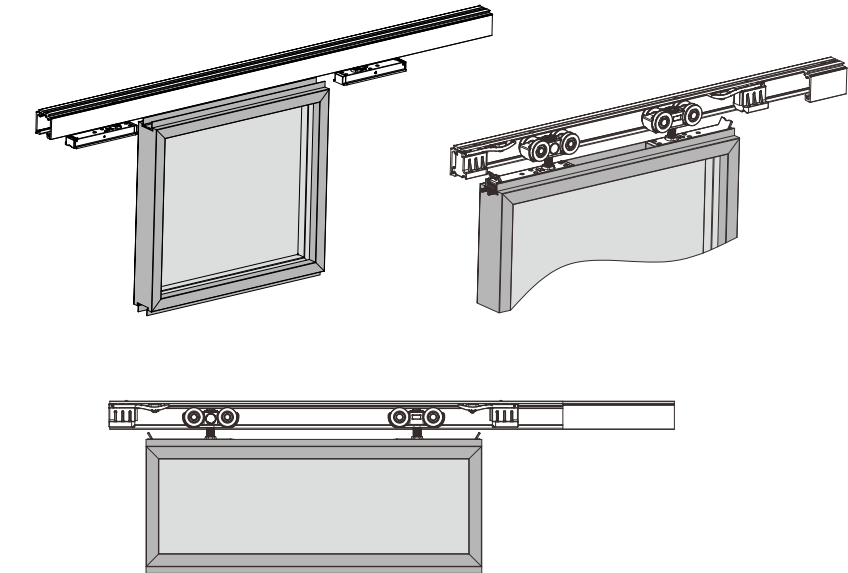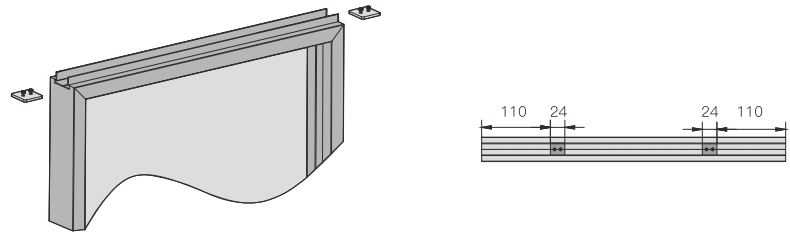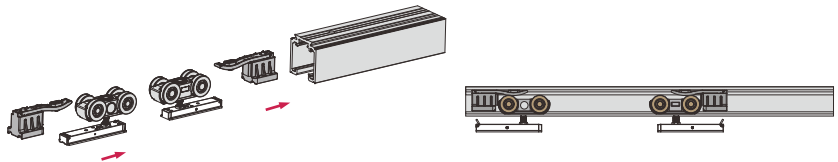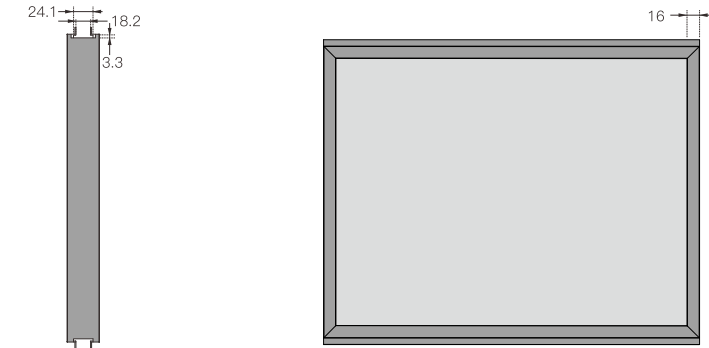

T903D


吊滑轮 (玻璃门开槽) HANGING SLIDING ROLLER (GLASS DOOR NEEDS SLOTTING)

安装参数 INSTALLATION

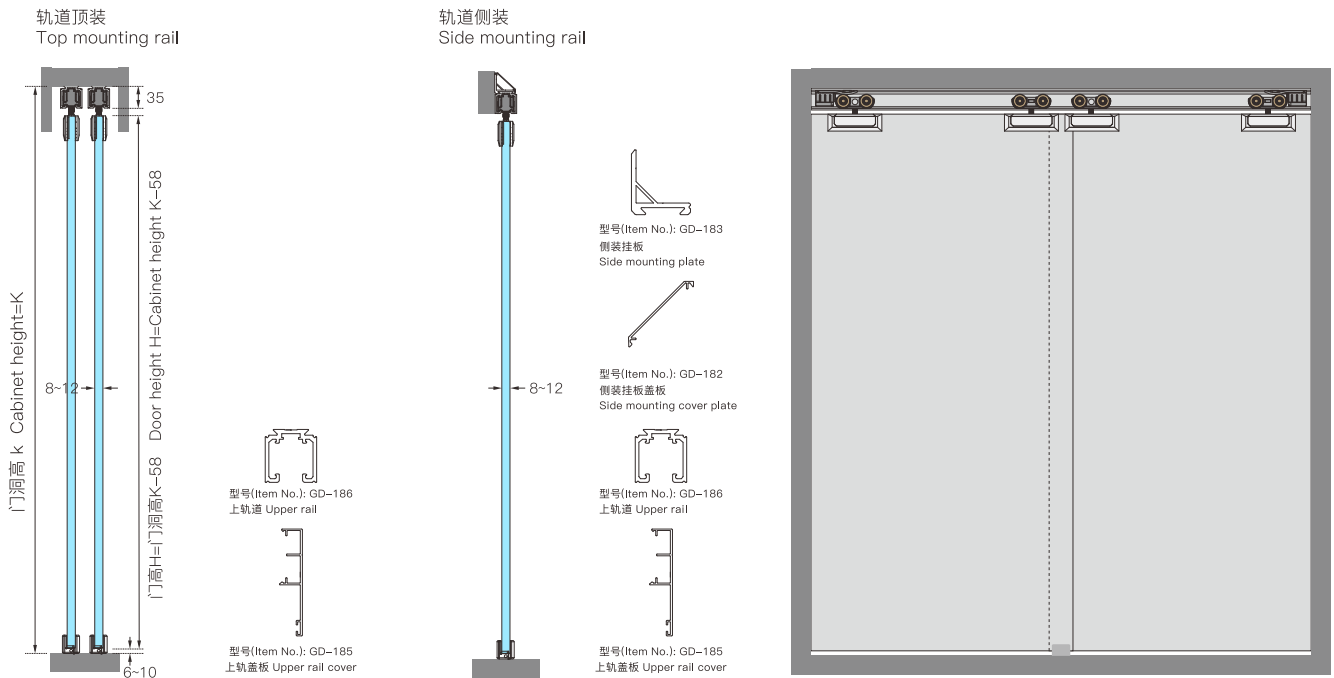


门扇宽度X=门洞宽度W+60
轨道长度L=门扇宽X*2-60

Door width X = Cabinet width W+60
Rail length L = Door width X*2-60

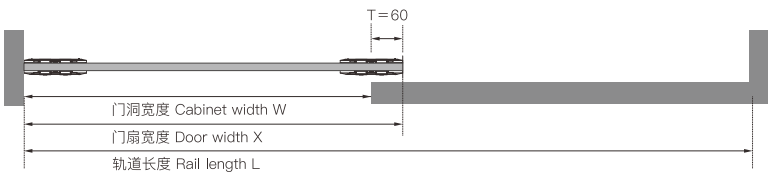


门扇宽度X=门洞宽度W/门数+30
轨道长度L=门洞宽度W

Door width X = Cabinet width W/doors qty+30
Rail length L = Cabinet width W

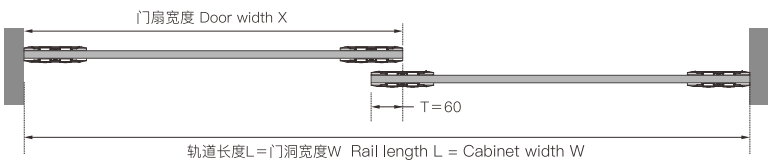


门扇宽度X=门洞宽度W/门数2+60
轨道长度L=门洞宽W*2+120


Door width X = Cabinet width W/doors qty2+60
Rail length L = Cabinet width W*2+120

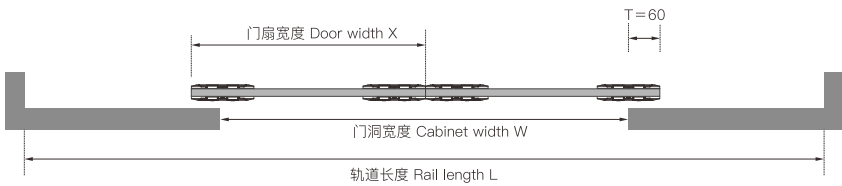


门板开槽
Door slotting

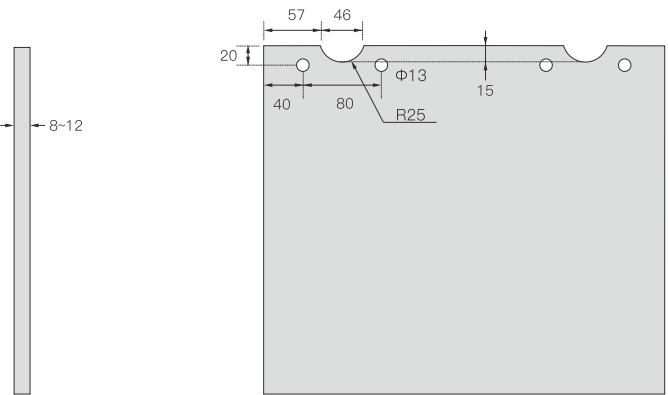



将门停组件和滑轮组件依次装入轨道内部
Stopper components and runners install into the rail

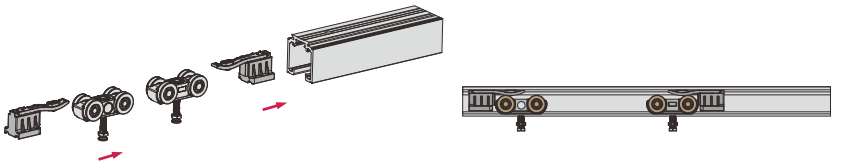

安装玻璃夹
Install glass fixer

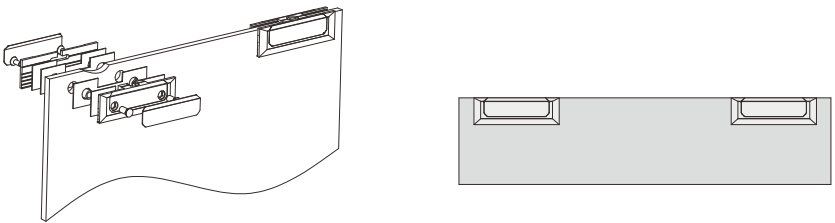

安装门板并调节门扇水平，安装完成
Install door panel and adjust door level to finish installation

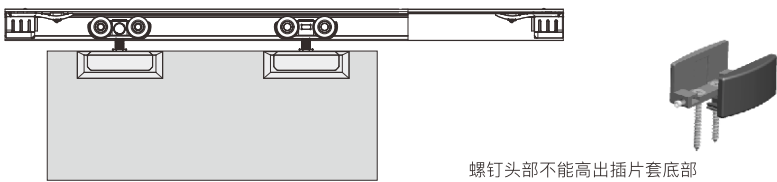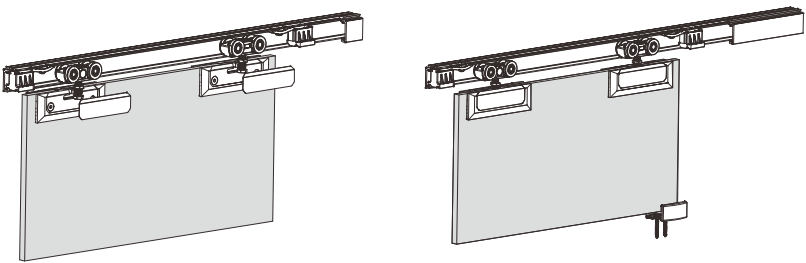


螺钉头部不能高出插片套底部
Screw head cannot higher than the bottom sleeve

T903E


吊滑轮 (玻璃门不开槽) HANGING SLIDING ROLLER (GLASS DOOR NO NEED SLOTTING)

安装参数 INSTALLATION

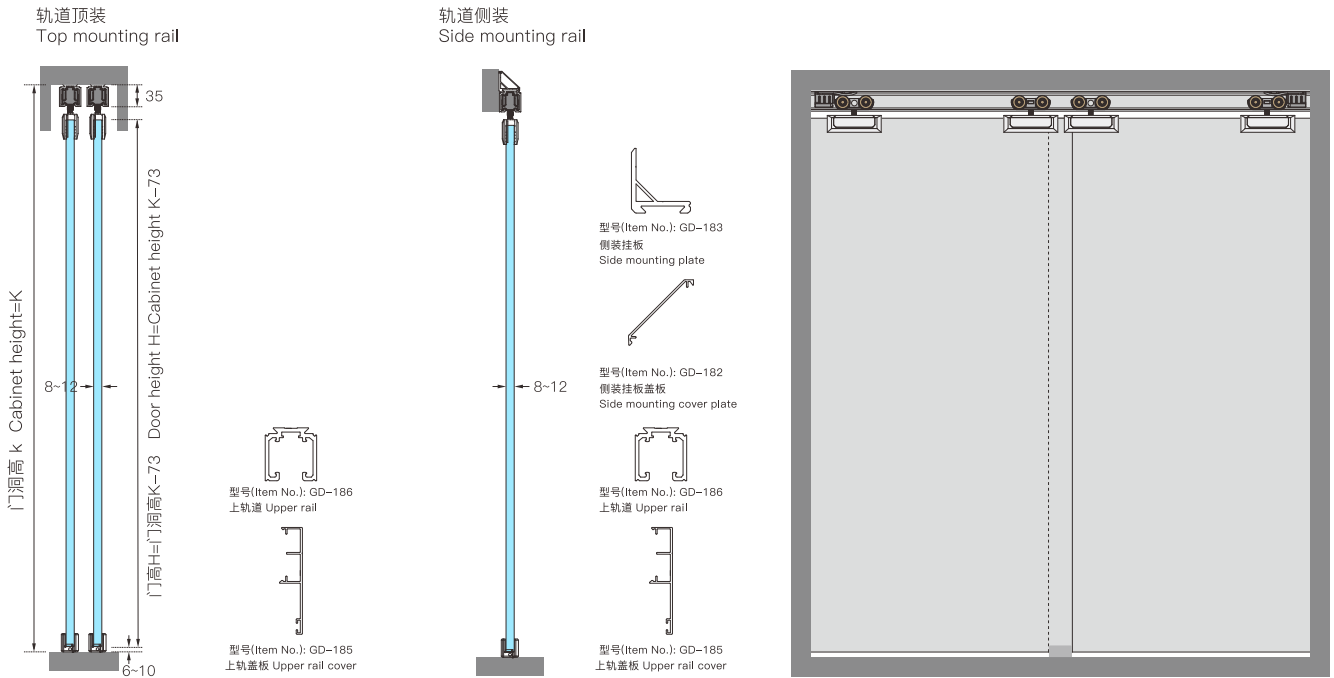


门扇宽度X=门洞宽度W+60
轨道长度L=门扇宽X*2-60

Door width X = Cabinet width W+60
Rail length L = Door width X*2-60

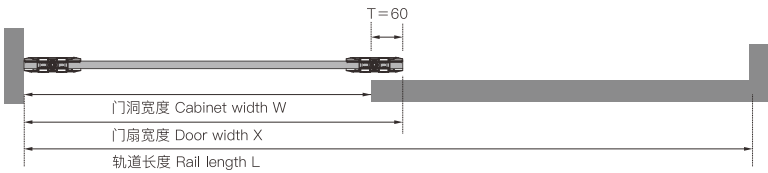


门扇宽度X=门洞宽度W/门数+30
轨道长度L=门洞宽度W

Door width X = Cabinet width W/doors qty+30
Rail length L = Cabinet width W

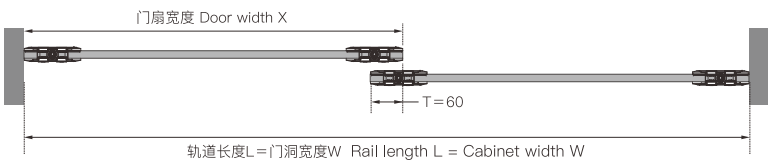

门扇宽度X=门洞宽度W/门数2+60
轨道长度L=门洞宽W*2+120


Door width X = Cabinet width W/doors qty2+60
Rail length L = Cabinet width W*2+120

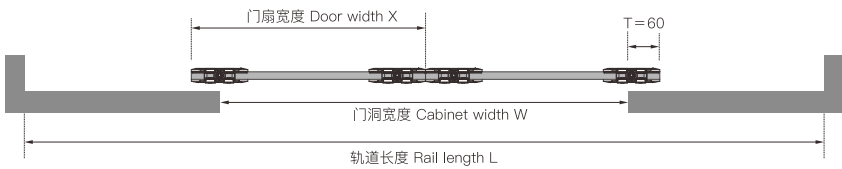


门板 Door panel





将门停组件和滑轮组件依次装入轨道内部
Stopper components and runners install into the rail

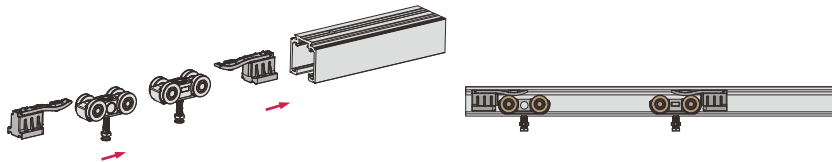

安装玻璃夹
Install glass fixer

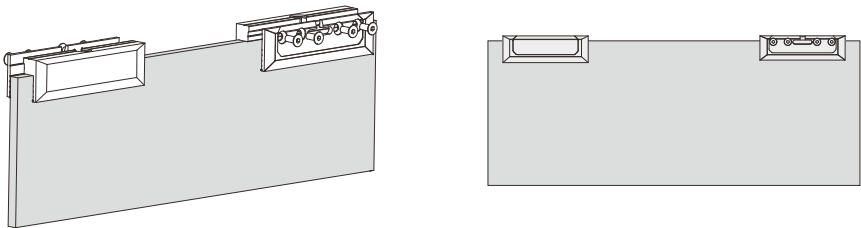

安装门板并调节门扇水平，安装完成
Install door panel and adjust door level to finish installation

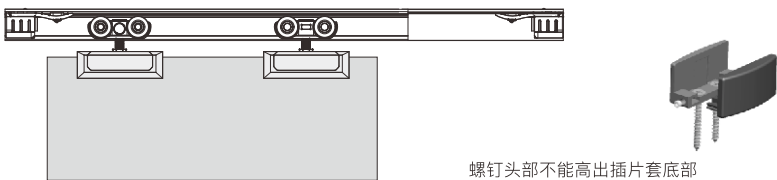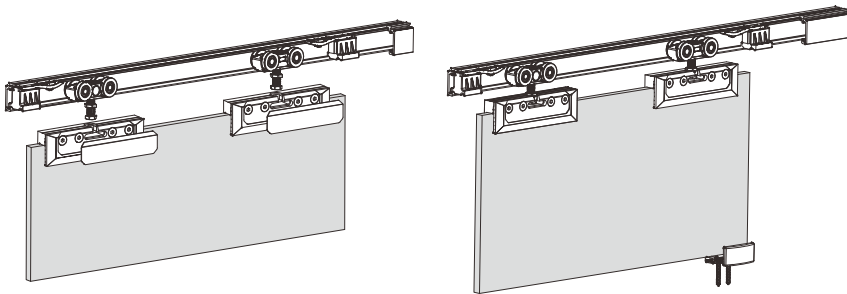

螺钉头部不能高出插片套底部
Screw head cannot higher than the bottom sleeve