



FULL EXTENSION SYNCHRONIZED PUSH OPEN UNDERMOUNTED SLIDE WITH LOCK (16MM)

Load capacity: 35Kg
 Length: 250–550mm
 Drawer height adjustment: 0~+3mm
 Drawer width adjustment: ± 1.5 mm
 Front panel gap adjustment: ± 2 mm

Installation dimensions(mm)
 SKW= Internal drawer width
 LW= Internal cabinet width

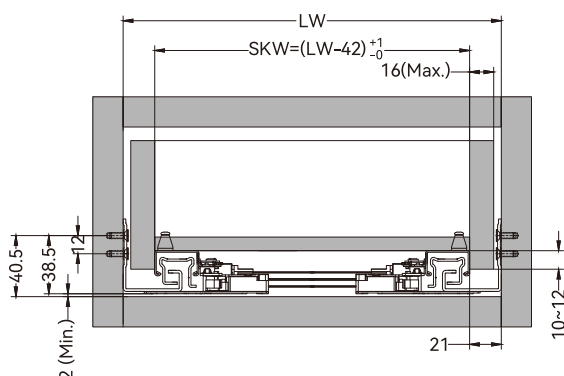


Hole positions(mm)

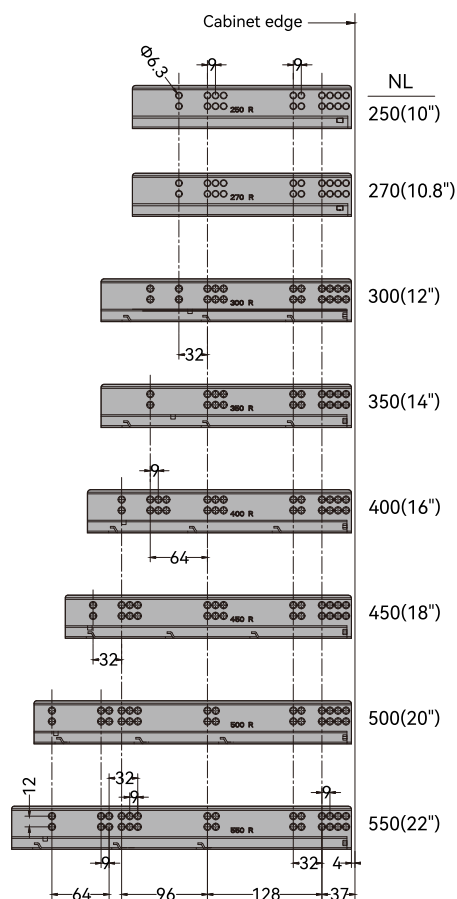


Installation Dimensions(mm)

NL= Nominal length
 LT= Internal cabinet depth
 X= Front panel thickness

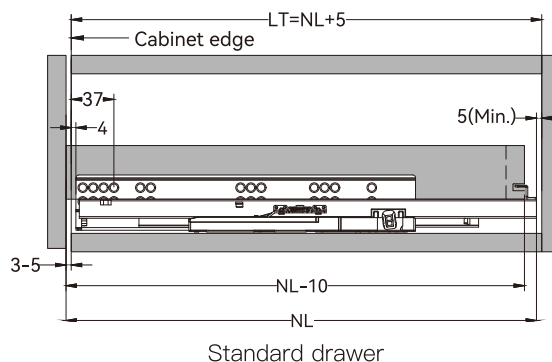


Standard drawer

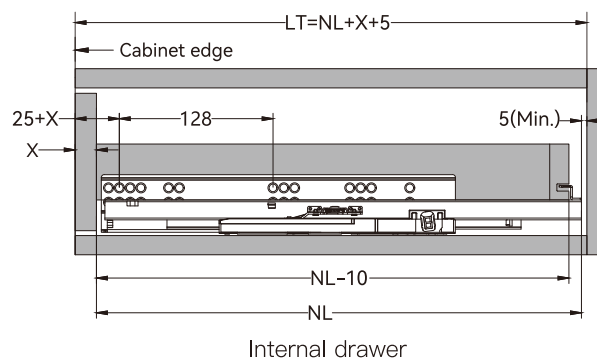


Internal drawer

Drawer size and drilling(mm)

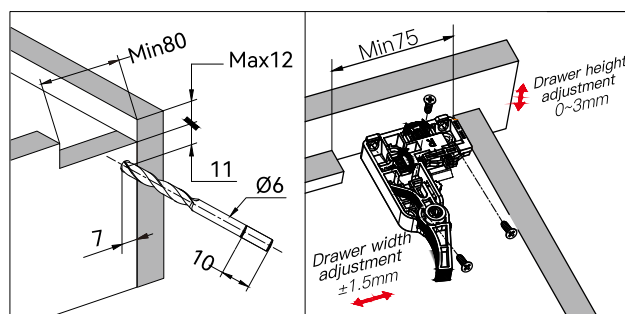


Installation steps for stablizer bar:


Cutting size of 16mm version stablizer bar
 =(LW-157)±1mm

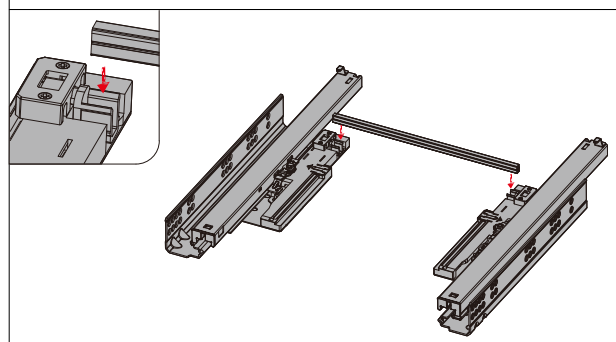

Front panel gap adjustment (±2mm)

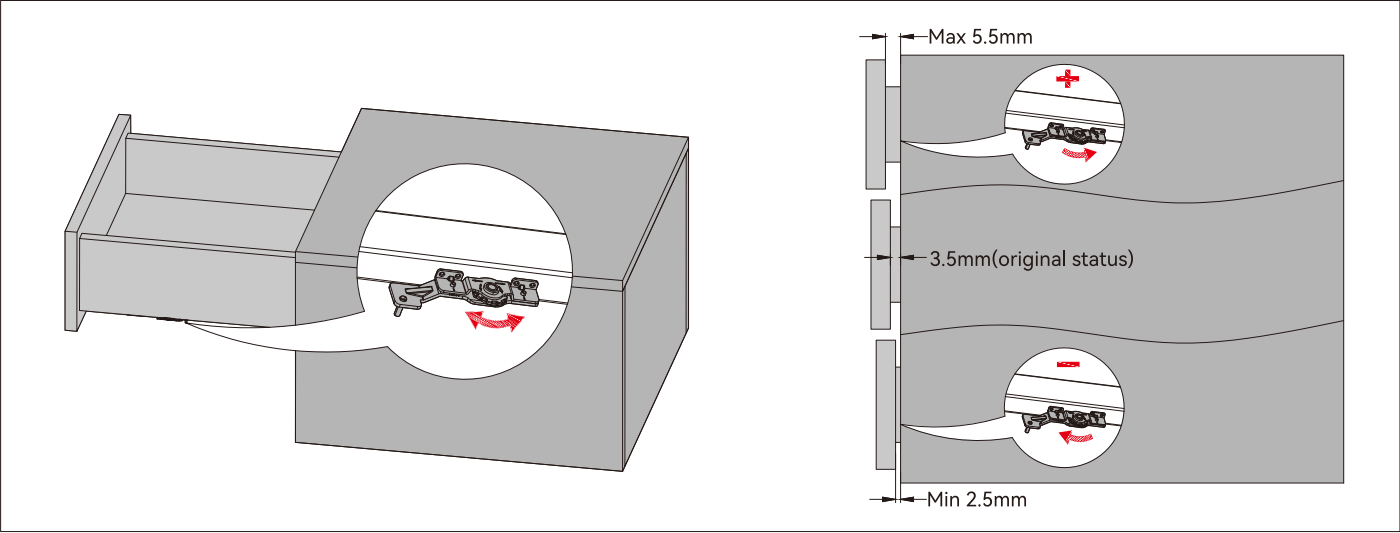

Suggested touching range

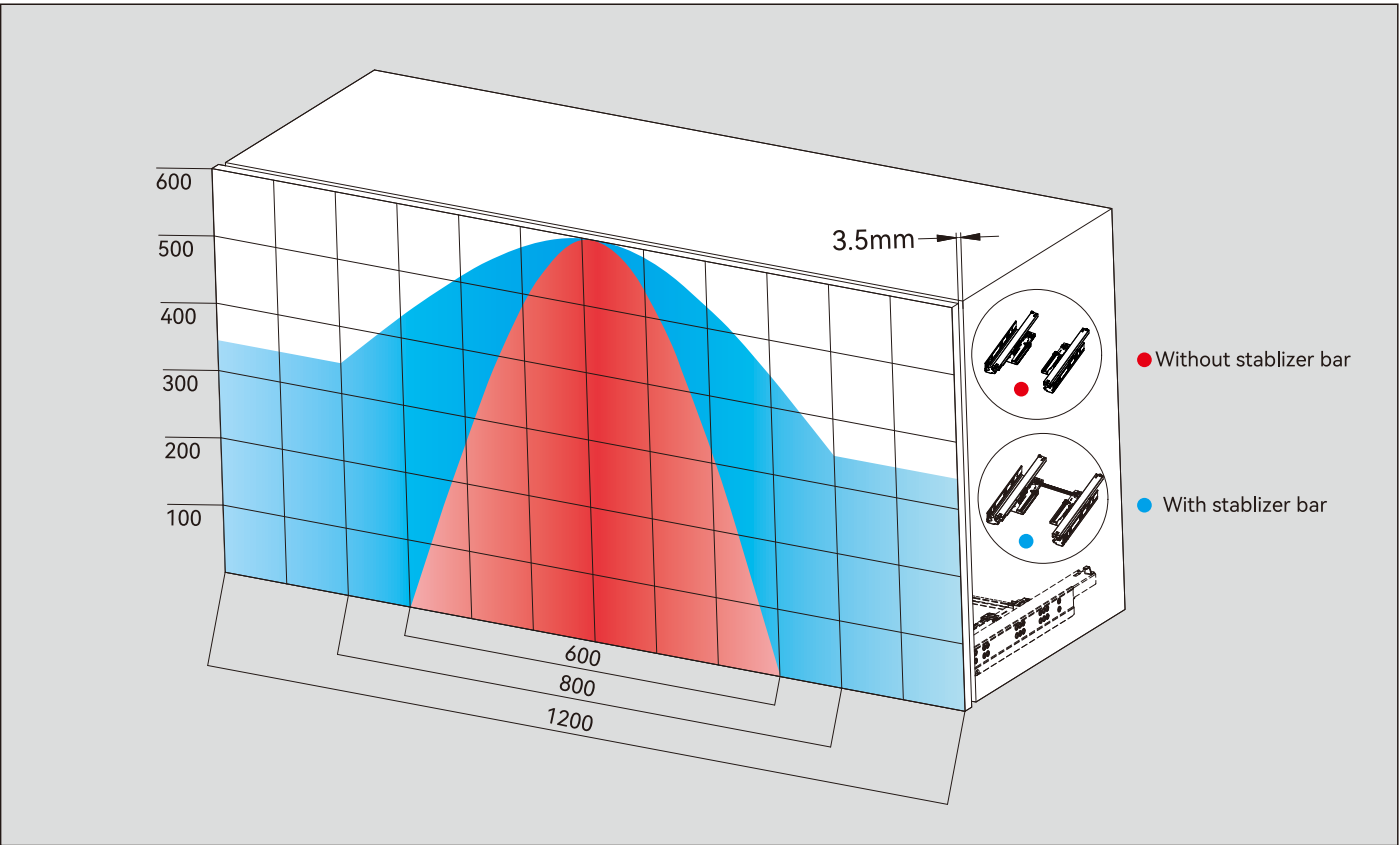

Installation of rebounder

