

FULL EXTENSION SYNCHRONIZED PUSH OPEN UNDERMOUNTED SLIDE WITH LOCK

Load capacity: 35Kg

Length: 250~550mm

Drawer height adjustment: 0~+3mm


Drawer width adjustment: ± 1.5 mm

Front panel gap adjustment: ± 2 mm


Installation dimensions(mm)

SKW=Internal drawer width

LW=Internal cabinet width

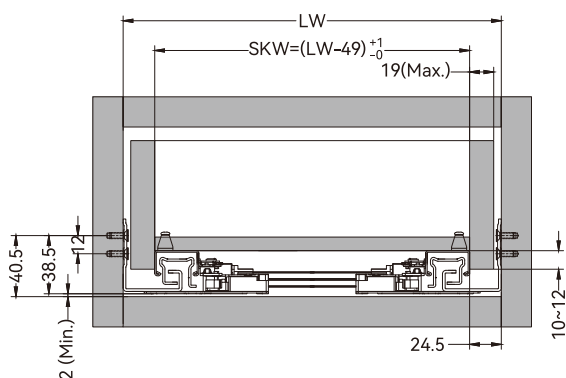

Hole positions(mm)

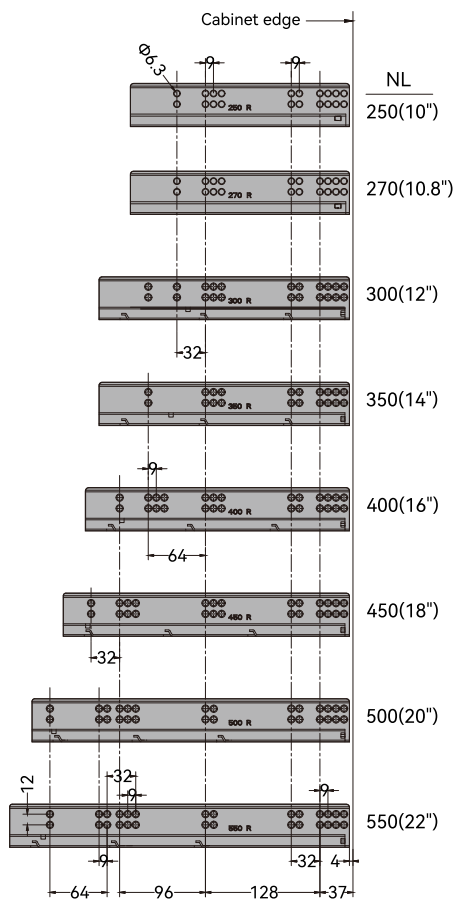


Installation Dimensions(mm)


NL=Nominal length

LT=Internal cabinet depth

X=Front panel thickness

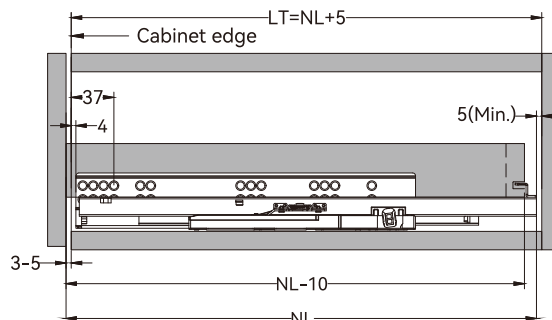


Standard drawer

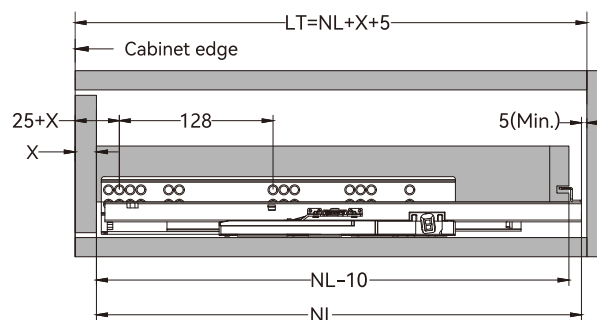


Internal drawer

Drawer size and drilling (mm)

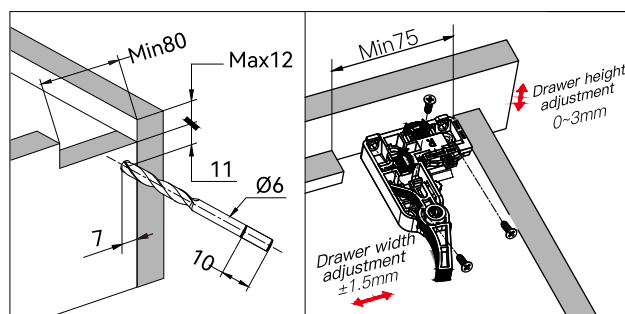


Installation steps for stablizer bar:


Cutting size of 18mm version stablizer bar
 $= (LW-164) \pm 1$ mm

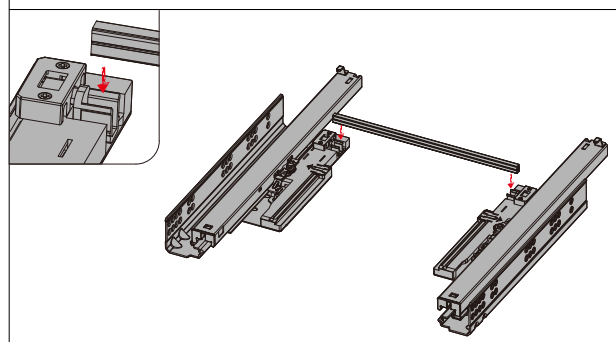

Front panel gap adjustment (±2mm)

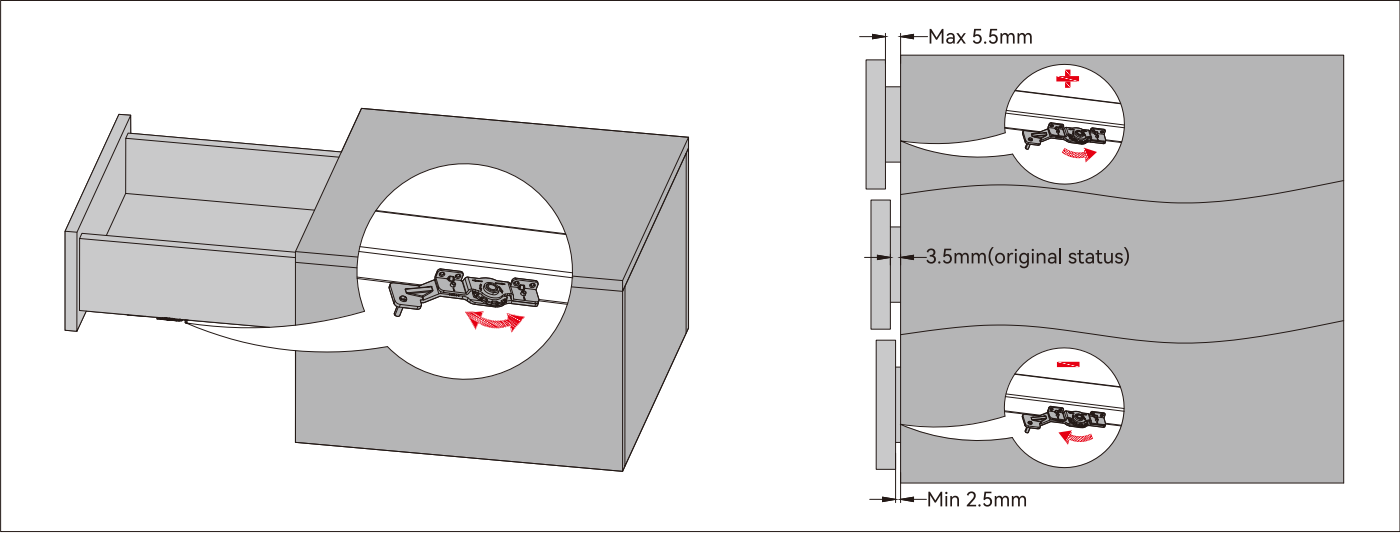

Suggested touching range

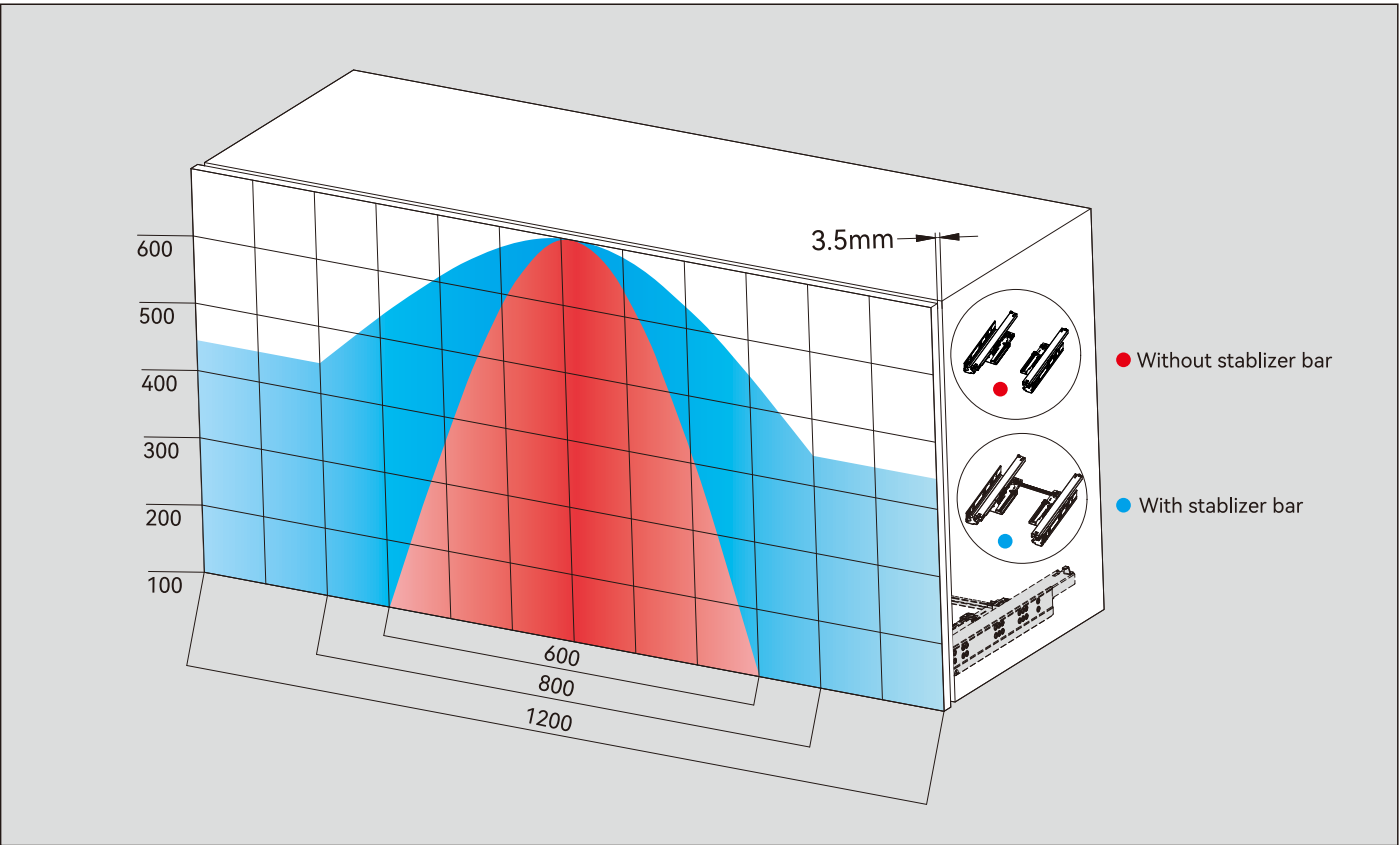

Installation of rebounder

