

T803

CUTTABLE IN-LINE SLIDING DOOR SYSTEM 可裁切平趟门

专利产品；
可裁切轨道；
新颖弯轨及滑轮结构，柜门关闭时在同一平面，整体美观、大气；
双向阻尼缓冲，轻柔闭合，延长家具寿命；
自动清洁毛刷结构，运行顺畅静音；
采用高强度轴承，单门承重80Kg；
适用门厚18-45mm的木门、框门、铝框门；
轨道在1350-1650mm， 1650-2050mm，
2050-2450mm， 2450-2850mm内随意裁切。

Patented product；
Cut freely within the range of 1500-3000mm；
Two doors close in one piece,neat looking；
Double soft closing function.to achieve long lifespan；
Automatic cleaning brush structure,smooth and silent operation；
Single door loading capacity 80Kg；
Suitable for wooden doors,frame doors and
aluminum frame doors with thickness of 18-45mm
Cut within 1350-1650 mm, 1650-2050 mm,
2050-2450 mm, 2450-2850 mm.




配件名称 Accessories	数量 Qty	配件图 Drawing
T803上轨组件 T803 Upper rail	1	
T803下轨组件 T803 Down rail	1	
T803上轮中间调节器 T803 Upper runner middle regulator	2	
T803上轮侧边调节器 T803 Upper runner side regulator	2	
T803下轮中间调节器 T803 Down runner middle regulator	2	
T803下轮侧边调节器 T803 Down runner side regulator	2	
15-8调节扳手 15-8 Spanner	1	
T803侧边加强拉簧 T803 Side Spring	2	
TH00020橡胶垫 (φ20*2) Th00020 Spacer (φ20*2)	4	


产品型号及规格 Product specification			
产品型号 Item code	适配标准柜体内宽 Cabinet standard inner width	轨道可裁切范围 Cutttable rail range	备注 Remark
T803-2050	2050mm	1650mm--2050mm	长度范围内客户可任意 裁切或按客户长度定制 Cut freely within the range
T803-2450	2450mm	2050mm--2450mm	长度范围内客户可任意 裁切或按客户长度定制 Cut freely within the range
T803-2850	2850mm	2450mm--2850mm	长度范围内客户可任意 裁切或按客户长度定制 Cut freely within the range
T803-1650	1650mm	1350mm--1650mm	长度范围内客户可任意 裁切或按客户长度定制 Cut freely within the range

安装参数详解 Specification

门板厚度含拉手≤45mm
Door Thickness ≤45mm (Handle included)

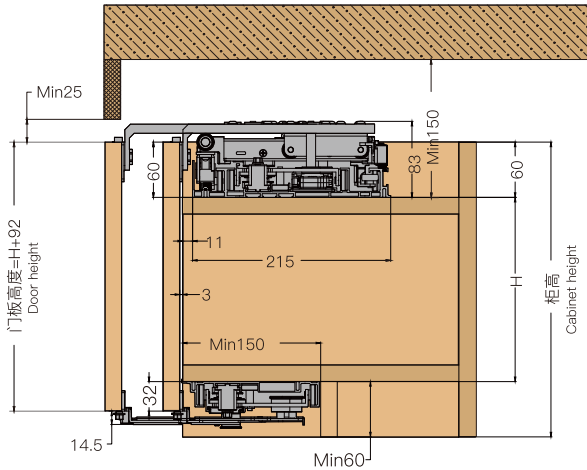

柜体要求 Cabinet requirements

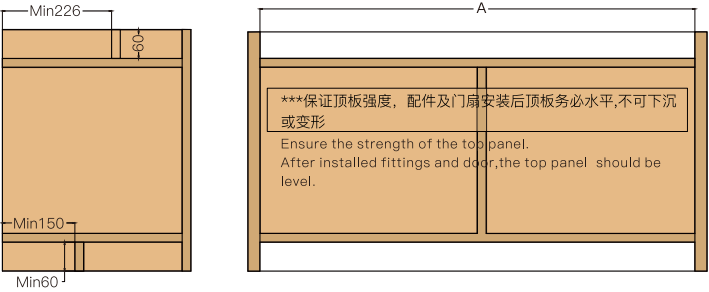


门板盖侧板
Door panel cover side panel

A=柜体内宽
B=门缝 (≥4mm)
C=门板盖侧边宽度(≤25mm)
D=门板宽度= (A+2C-B) /2

A=Inner width of cabinet
B=Gap between two doors(≥4mm)
C=Side panel width(≤25mm)
D=Door width=(A+2C-B)/2

两门柜体参数图 Two doors cabinet parameters

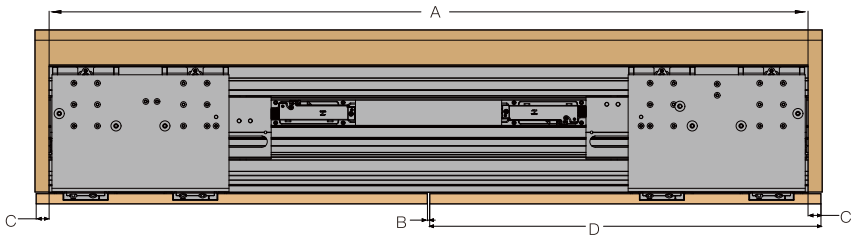


A=单套产品长度
D=门板宽度= (K+2C-2B-E) /4
E=中间两门门缝
(两门不同时打开E≥3mm;两门同时打开E≥6mm)
K=四门柜体总内宽

***下单根据A值选择T803中一款，
备注单套轨道长度K/2数值即可

A=Single product standard length
D=Door width=(K+2C-2B-E)/4
E=Gap between middle two doors
(two doors not open at same time,E≥3mm,
two doors open at same time,E≥6mm)
K=Four door Inner width of cabinet

四门柜体参数图 Four doors cabinet parameters

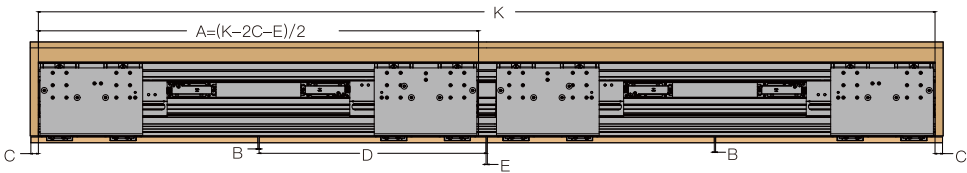

According to A value to choose the product length,
remark Single rail lengths K/2

门板不盖侧板
Door panel not cover side panel

A=柜体内宽
B=门缝 (≥4mm)
C=门板盖侧边宽度(≤25mm)
D=门板宽度= (A-2C-B) /2

A=Inner width of cabinet
B=Gap between two doors(≥4mm)
C=Side panel width(≤25mm)
D=Door width=(A-2C-B)/2


A=标准产品长度
D=门板宽度= (K-2C-2B-E) /4
E=中间两门门缝
(两门不同时打开E≥3mm;两门同时打开E≥6mm)
K=四门柜体总内宽

***下单根据A值选择T803中一款，
备注单套轨道长度K/2数值即可


A=Single product standard length
D=Door width=(K-2C-2B-E)/4
E=Gap between middle two doors
(two doors not open at same time,E≥3mm,
two doors open at same time,E≥6mm)
K=Four door Inner width of cabinet

According to A value to choose the product length,
remark Single rail lengths K/2

两门柜体参数图 Two doors cabinet parameters

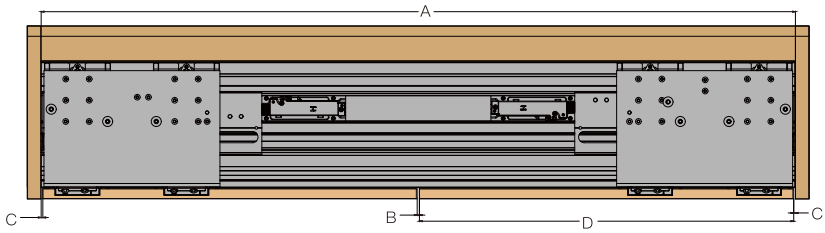

四门柜体参数图 Four doors cabinet parameters

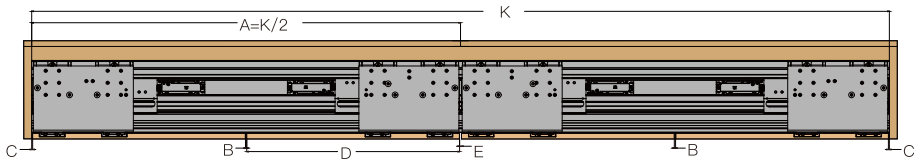

门板参数加工并安装配件
Install accessories in the door

产品规格 Product Specification	T803-2050	T803-2450	T803-2850	T803-1650
L	270	370	470	195

