




















WOODEN DOOR HANGING SLIDING ROLLER





## Accessory List:

Accessories	Quantity (PCS)	Accessories	Quantity (PCS)
Outside rollers 	1	Inside rollers with damper 	1
Inside rollers 	1	Outside rollers with damper 	1
Belt fixing part 	1	Damper stopper 	2
Linkage runner guider 	2	M4*6 screw 	2
Transmission belt 12 meter 	1	Wooden door down guiding roller 	2
ST3.5*12 cross countersunk head tapping screws 	4	Wooden door hanging plate 	4
2mm allen key 	1	M4*12 inner hexagon screw 	8
2.5mm allen key 	1	3mm extended allen key 	1
4mm allen key 	1	ST4*30 cross countersunk head tapping screws 	20

Function	Door width	Single door loading capacity	Door thickness	Installation	Installation
Double soft close	530mm -1200mm	60-100Kg	35-60mm	Top install with side hanging plate	


Fixed door accessories are optional

## 1、Door Dimension

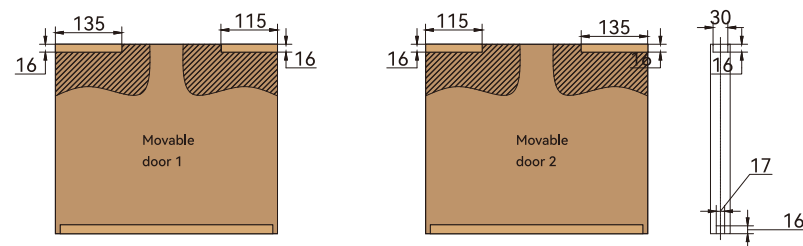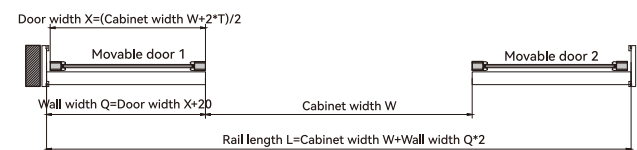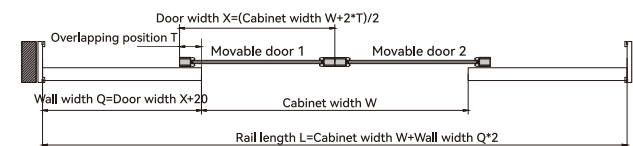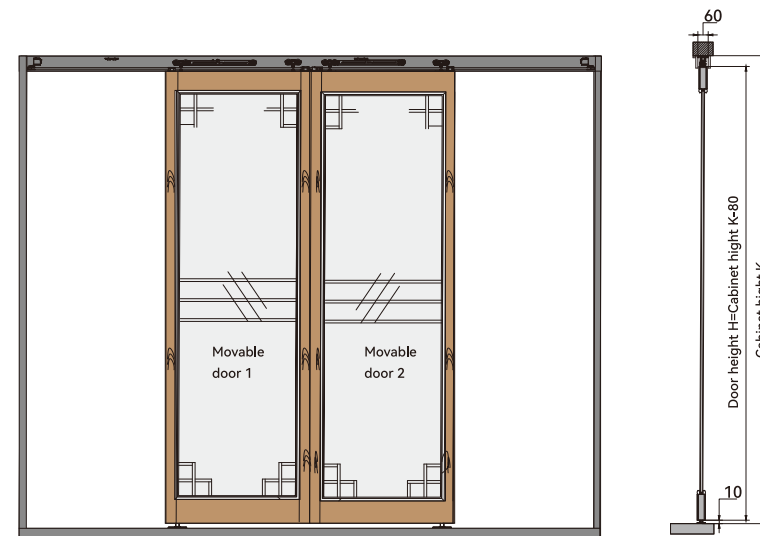


## 2.Rail accessory assembling

1、 Insert the incongruous synchronous rollers, damper stoppers and rollers into the rail in sequence, as shown in the picture. Door stoppers put in each end of track while rollers in the middle. Make sure that there are no impurity or aluminum scraps in the rail before installation.  
2、 Pull the rollers manually. If there's no abnormal noise, fix the rail to the ceiling with self-tapping screws.

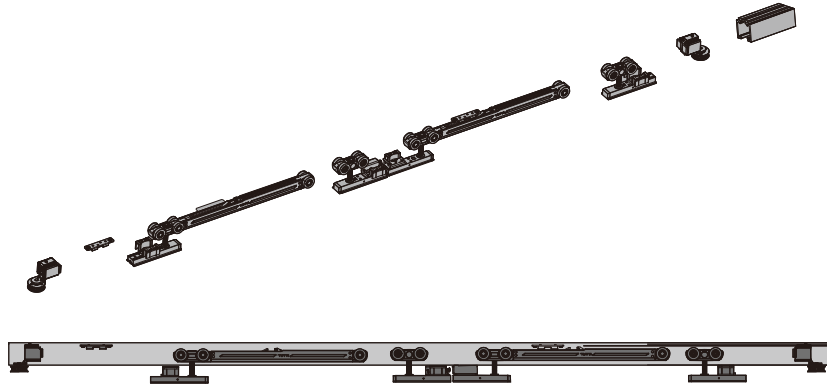


## 3.Linkage belt assembling

Pass the synchronous belt through the incongruous gearing wheel at both ends of the upper rail and plastic part on the hanging box, and connect the two ends of belt through the belt fixing part. The belt fixing part must be locked with 2 mm inner hexagon screw through M4\*4 screws, the belt fixing part is fixed to the hanging box through M4\*6 screw without any looseness.

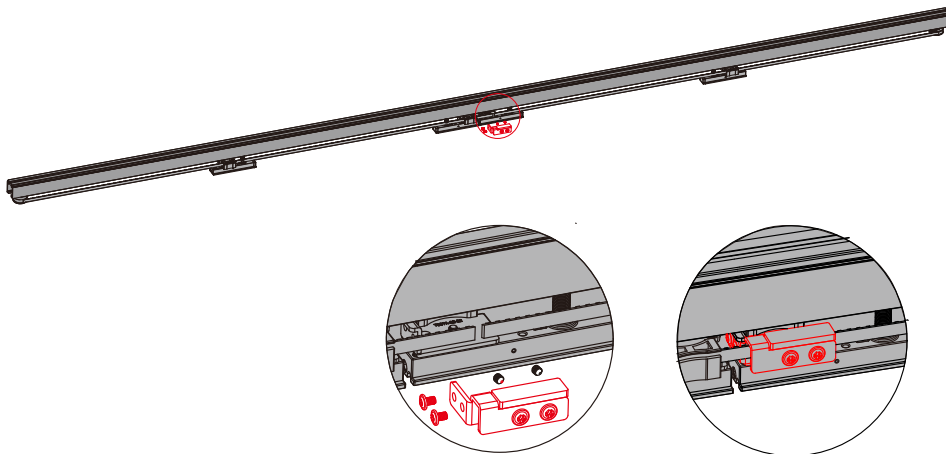

## 4.Door accessory assembling

Install the hanging box above the door, and the convex part of the hanging box facing inward, fix down rail under door with self-tapping screws. screw head must not be higher than the bottom of down rail.

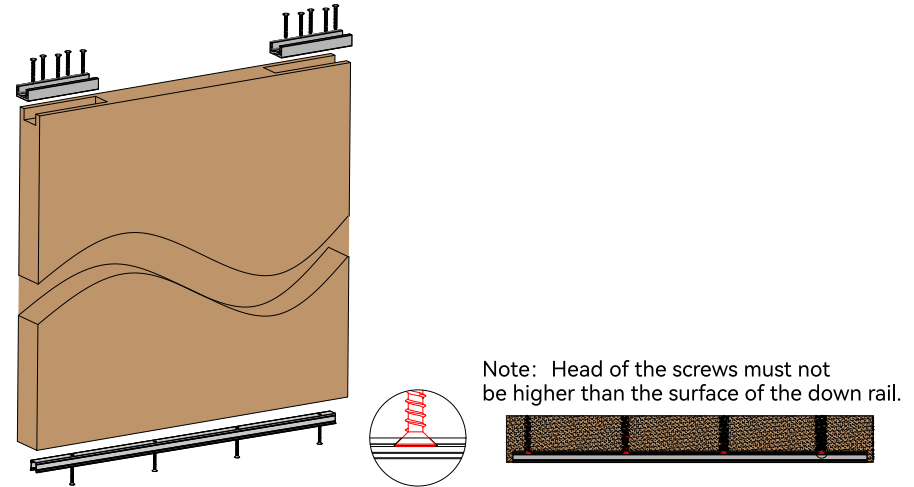


## 5.Door assembling

Fix top installed hanging plate from the side of the mounting plate through M4\*12 inner hexagon screw by 2.0 inner hexagonal wrench, fixed the screw without any looseness.

## 6.Down guider assemble instuction

After the door is installed, close the doors and move the door to the middle, install the down guider wheel as shown in the picture.

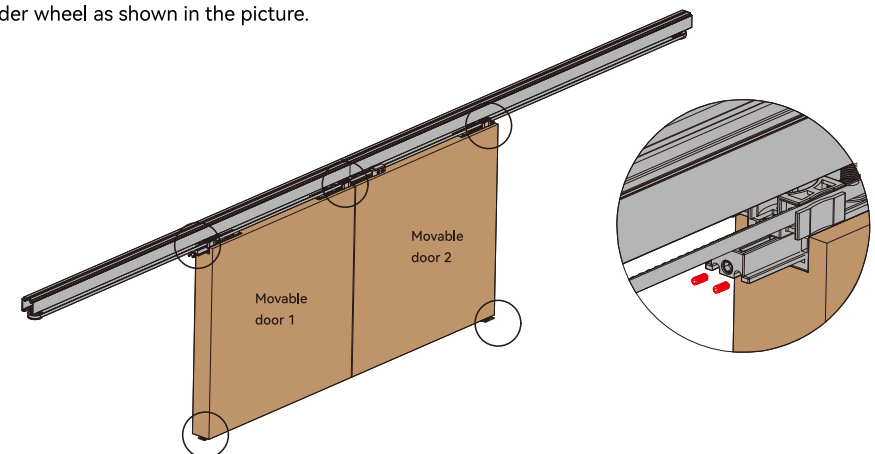

### 7.Fixed Top belt hanging plate

Open the doors and move the door to the both sides, insert the belt into the slot of the Inside rollers, fixed the belt with screwdriver.

