




配件名称 Accessories	数量 Qty	配件图 Drawing
上轨道组件 Upper Rail	1	
802A连杆组件 Connecting rod component	2	
门板侧导向轨 Door panel side direction rail	4	
右门中间调节器 Right door middle regulator	1	
右门侧边调节器 Right door side regulator	1	
左门中间调节器 Left door middle regulator	1	
左门侧边调节器 Left door side regulator	1	

产品型号及规格 Product specification


产品型号 Item code	适用柜体内宽 Cabinet inner width	轨道可裁切范围 Cuttable rail range	门宽范围 (门板盖刨板25mm) Door width (door panel cover side panel 25mm)	门高范围 Door height
T802A-1750	1750mm	1150mm—1750mm	600mm—900mm	≤1000mm
T802A-2350	2350mm	1750mm—2350mm	900mm—1200mm	≤1500mm

吊柜安装 Hanging cabinet installation

X=顶板厚度
E=门板盖板厚度
X=Top panel thickness
E=Thickness of door panel cover bottom panel

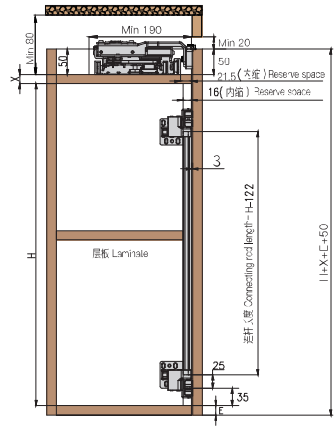


柜体要求 Cabinet requirements

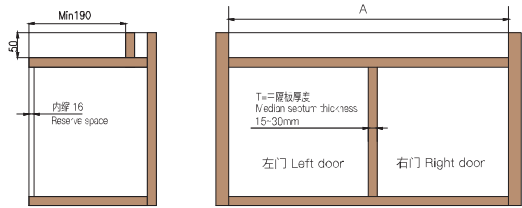


门板尺寸参考 Door size

A=柜体内宽
D=门缝(3-5mm)
B=门板盖侧板宽度(-3-25mm)
C=门板宽度=(A+2D-D)/2
A=Cabinet inner width
D=Door gap(3-5mm)
B=Width of door panel cover side panel(-3-25mm)
C=Door width=(A+2D-D)/2

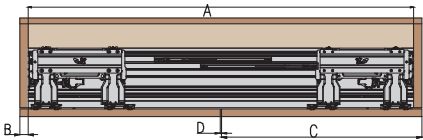


门板配件安装
Door accessories inatallation

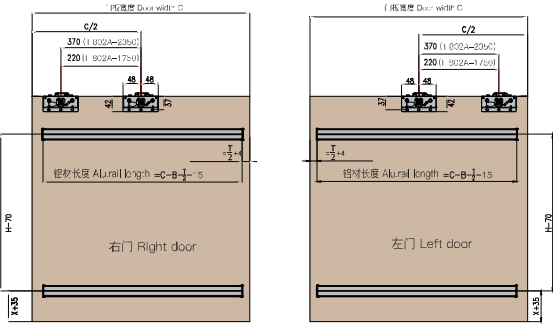


地柜安装 Floor cabinet installation

X=门板盖顶板厚度
E=底板厚度
X=Thickness of door panel cover top panel
E=Bottom panel thickness

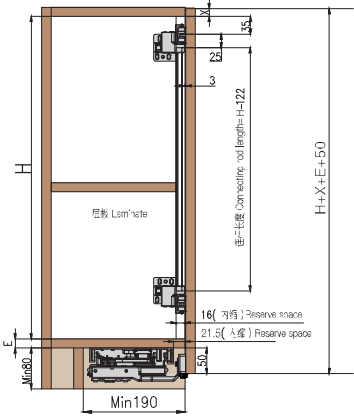


柜体要求 Cabinet requirements

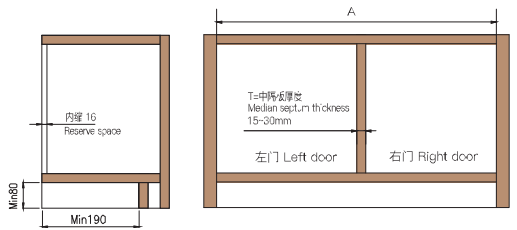

门板尺寸参考 Door size

A=柜体内宽
D=门缝(3-5mm)
B=门板盖侧板宽度(-3-25mm)
C=门板宽度=(A+2D-D)/2
A=Cabinet inner width
D=Door gap(3-5mm)
B=Width of door panel cover side panel(-3-25mm)
C=Door width=(A+2D-D)/2

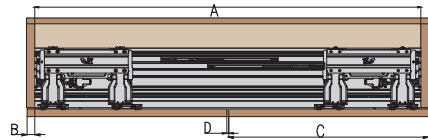

门板配件安装
Door accessories inatallation

